Evaluatin-A

- Autonomous CO₂ Evaluation
- Real Time Recordings of CO₂ Levels
- Measures Full Suite of Other Environmental Parameters



About the EvaluatiR-A

The EvaluatIR-A evaluation kit provides users with a convenient way to evaluate GSS CO₂ sensor technology in an easy-to-use battery-powered package. The EvaluatIR-A

integrates the CozIR®-A sensor module that uses patented NDIR solid-state LED optical technology to deliver consistent and accurate CO₂ measurements.


The evaluation kit measures CO_2 over a 0-1% range as well as relative humidity, temperature and barometric pressure. The evaluation kit connects to a PC via a USB port and includes software that allows the user to stream data to the PC. All recorded data is time-stamped allowing users to easily analyse CO_2 sensor behaviour.


The evaluation kit will operate for up to 12 months on 2 x AA batteries (not included).

In the Kit

- EvaluatIR-A Module
- USB Cable
- Evaluation Software
- Protective Carry Case

Software Interface

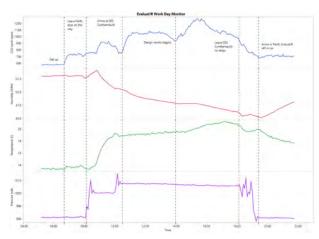

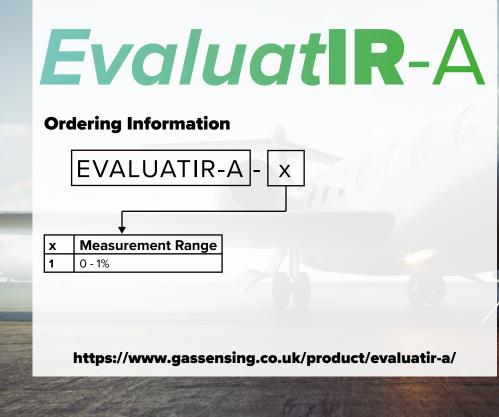



CO₂ Sensor Specifications

| Measurement Ranges | 0-1% |
|---------------------|--------------------------------|
| Accuracy (typ.) | 0-1% ±(30ppm +3% of reading) |
| Response Time | 2 Minutes (Diffusion limited) |
| Readings per Second | 2 |
| Sample Method | Solid-state LED NDIR Diffusion |

Electrical and Mechanical Specifications

| Measurement Output | USB Mini to PC Application |
|-----------------------|----------------------------|
| Power | 2 x AA Batteries |
| Dimensions and Weight | 145mm x 95mm x 35mm, 225g |

Operating Conditions

| Operating Conditions - Temperature | 0°C to 50°C |
|---|---------------------------|
| Operating Conditions - Humidity | 0-95% RH, non-condensing |
| Storage Conditions - Temperature | -30°C to +70°C |
| Pressure Dependence | 0.15% of reading per mbar |
| Environmental Compliance | RoHS and REACH |

Product Flyer- Document Version: 06/03/2020-001